800-882-8285



The new Venus 2nd GEN (SBP-TBF) Series of uninterruptible power supplies with Transformer-Based Filter (TBF™) offers high performance and comprehensive power protection. This advanced power protection solution offers battery backup plus the ability to regulate voltage fluctuations through an integrated Automatic Voltage Regulator (AVR).

What it does

- Provides emergency power in case of a power outage
- Prevents data loss from system crashes
- Protects your investment

Protection against...

- Blackouts With battery backup
- Spikes and surges With TBF[™] Technology
- Under or over voltage fluctuations -With automatic voltage regulation
- Lightning With surge protection

Benefits

- 100% uptime
- Save money on power related service calls
- Improve business productivity
- Equipment operates as intended
- Equipment lasts longer (customer satisfaction)



Uninterruptible Power Supply With **Electronic Power Conditioner**

Complete Power Protection Solutions to Keep Business Systems Running Smoothly

WHAT'S NEW

- Easier user replaceable battery
- User can see backup time left on battery
- Programmable battery test

Applications









POINT OF SALE BACK OFFICE SYSTEMS

SERVERS

SELF SERVICE KIOSKS CHECKOUT

HOME THEATERS




SURVEILLANCE SYSTEMS



ATMS



A POWER QUALITY COMPANY

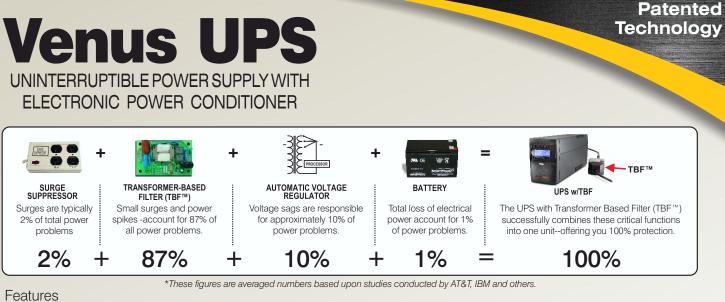

- Electronic Power Conditioner (TBF[™])
- "Smart Ground" technology Controls ground noise to protect network systems and also eliminates ground loop current
- Automatic save and shutdown software for unattended computers




Smart Power provides a complete line of software solutions for standalone and networked computers, including SNMP support. Supports: 7/8/10/2000/2003/NT/

Server 2008. UPSwing Pro™ for Linux, SCO Unix, Sun Solaris, FreeBSD and Windows with Networking capability is available.

- Line interactive design
- Automatic Voltage Regulation
- Programmable battery test
- Fully microprocessor controlled
- USB port

SBF

- 50/60 Hz auto sensing
- · Audible low-battery indicator
- Cold start (DC power on)
- Two-year equipment warranty
- Two adapter cord for equipment with transformer blocks

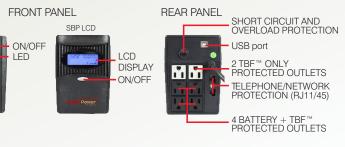

Specifications

MODEL		SBP0400TBF-6U	SBP0600TBF-6U	SBP0800TBF-6U
		SBP0400TBF-6U-LCD	SBP0600TBF-6U-LCD	SBP0800TBF-6U-LCD
Output Capacity \	VA/W	400 / 240	600 / 360	800 / 480
Output Voltage	(On battery)	120V ±10% 50 or 60 Hz ±0.5%		
TRANSIENT LET Through Voltage		<0.5V Common Mode (N-G) / <10V Normal Mode (L-N) None of the competitors publish N-G Pass Through Voltage		
Visual Indicators		LED (UPS On, Battery On), LCD Display (SBP-LCD models)		
Interface Port		USB		
Back-up Time Half Load	(Minutes)	14	8	7
Net Weight	(Lbs. / Kg.)	11.02/5.0	12.34/5.6	12.56/5.7
Shipping Weight	(Lbs. / Kg.)	11.8 / 5.35	15.1 / 6.84	15.7 / 7.12
Dimensions D x W x H In. (mm)		13 x 4 x 5.6 (330 x 102 x 142)		
Receptacles		4-NEMA 5-15R (BATTERY + TBF) + 2-NEMA 5-15R (TBF ONLY)		
Safety		cUL, UL		

220/230/240V models available. Consult factory for specifications and features. Specifications and features subject to change without notice.



If the Smart Power Systems equipment fails and this failure allows a surge to pass through and damage the connected equipment, Smart Power Systems will pay for the repair or replacement of the connected equipment up to \$25,000.





www.smartpowersystems.com

800-882-8285

1760 Stebbins Dr. • Houston, TX 77043 Tel:713-464-8000 Fax: 713-984-0841 Email: sales@smartpowersystems.com